


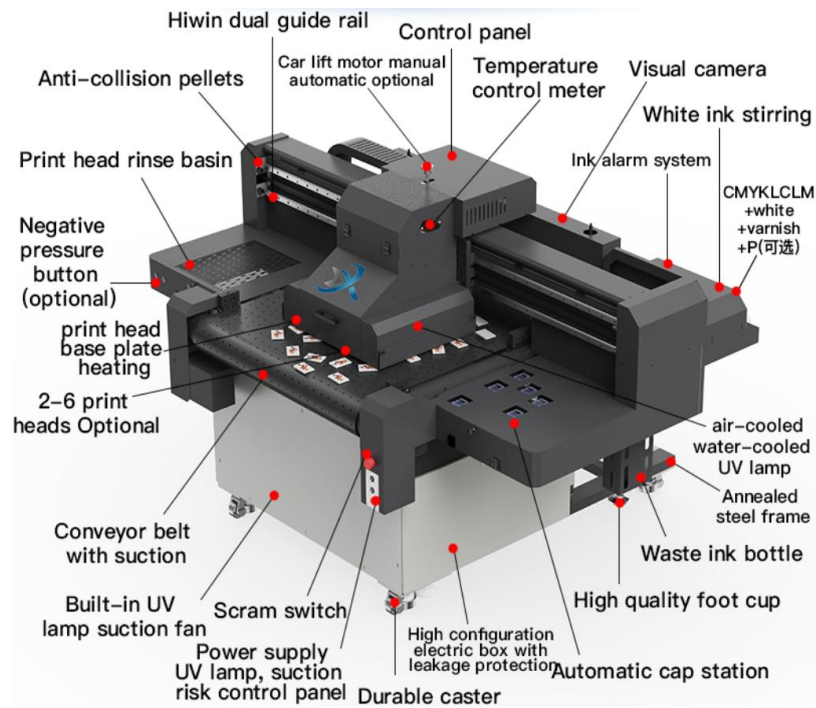

Model	XMS-9060L-G5i/i3200u/XP600/G5/G6conveyor belt CCD visual positioning printer					
	Honson/WUHAN/DPCS/UMC mainboard					
Appearance	Black grey+ medium grey					
Print Head	RicohGEN5i/i3200u/G5/G6/XP600(1-8)					
Rail	Double rail					
Color	CMYK+Lc+Lm+White+Varnish					
Printing Speed(sqmh)	Printhead	GEN5	GEN6	GEN5i	i3200u	XP600
	dpi					
	720×600dpi(4PASS)	26m²/h	32m²/h	4m²/h	10m²/h	4m²/h
	720×900dpi(6PASS)	20m²/h	24m²/h	3m²/h	8m²/h	3m²/h
	720×1200dpi(8PASS)	15m²/h	18m²/h	2m²/h	6m²/h	2m²/h
Print size (mm)	940					
Print Thickness(mm)	Platform lifting.0.1mm~175mm cylinder print diameter 10mm~100mm (Ultra-high customizable)					
Curing System	LED UV Lights					
Image Format	TIFF/JPG/EPS/PDF/BMP					
Rip Software	PHOTOPRINT/Maintop/Riin Rip-honson					
Negative pressure	White and color separate negative pressure					
Power Supply	AC220V50HZ±10%					
Temperature	20-32°C					
Humidity	40-75%					
Power	2500W					
Appearance Size(mm)	Length/width/height:2140/1950/1340					
Data Transmission	TCP/IP network interface					
NetWeight(kg)	400					
Wooden box size(mm)	Length/width/ height: 2240/2050/1450					
Suction system	750Wbrand fans					
Automatic height measurement	Thesystem drives the automatic height measurementfunction					

Note:the abovetechnital parameters are forreference only, subjecto the actual equi pment.